
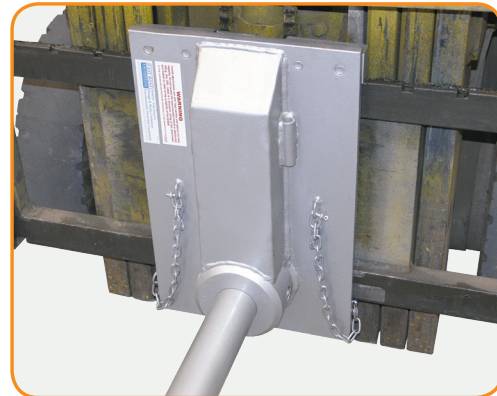
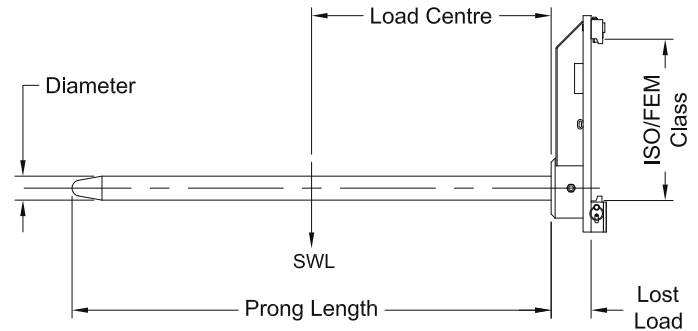


Type RPC Carriage Mounted Roll Prong

The RPC Carriage Mounted Roll Prong is suitable for carpet, vinyl, fabric etc. Units are available for Class II, III and IV forklift carriages, along with pin mounted.

All "QR" model roll prongs are fitted with "Quick Release" mounting locks providing a safe and easy connection to the forklift carriage, saving time and eliminating the need for any tools. Prongs are made from high tensile steel. Enamel paint finish.

- Lost Load for Class II: 100 mm
- Lost Load for Class III: 225 mm
- Lost Load for Class IV: 280 mm

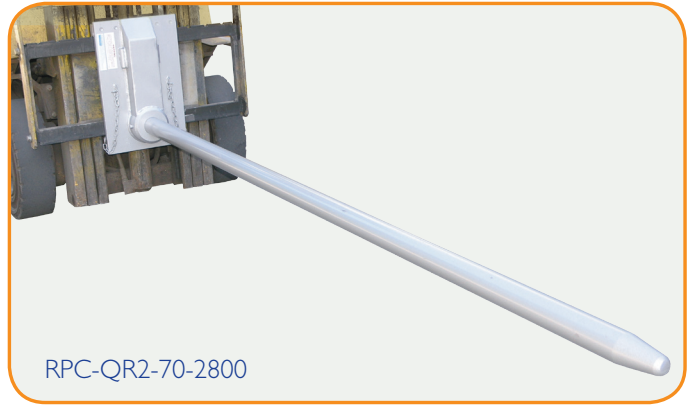

Type	Mounting Class	Prong Diameter (mm)	Prong Length (mm)	Safe Working Load / Load Centre	Unit Weight (kg)
RPC-QR2-40-1200	Class II	40	1200	200 kg at 600 mm	63
RPC-QR2-50-1800	Class II	50	1800	250 kg at 900 mm	79
RPC-QR2-60-2800	Class II	60	2800	340 kg at 1400 mm	113
RPC-QR2-70-2800	Class II	70	2800	510 kg at 1400 mm	135
RPC-QR2-80-2800	Class II	80	2800	850 kg at 1400 mm	166
RPC-QR3-70-2800	Class III	70	2800	510 kg at 1400 mm	184
RPC-QR3-80-2800	Class III	80	2800	850 kg at 1400 mm	220
RPC-QR3-90-2800	Class III	90	2800	1285 kg at 1400 mm	248
RPC-QR3-100-2800	Class III	100	2800	1700 kg at 1400 mm	282
RPC-BH4-125-1200	Class IV	125	1200	6500 kg at 600 mm	280
RPC-BH4-125-2800	Class IV	125	2800	2785 kg at 1400 mm	440
RPC-BH4-150-1200	Class IV	150	1200	10,000 kg at 600 mm	360
RPC-BH4-150-2800	Class IV	150	2800	4285 kg at 1400 mm	565
RPC-PM-200-1200	Pin Mount	200	1200	13,000 kg at 600 mm	1400

OTHER PRONG LENGTHS AVAILABLE ON REQUEST