
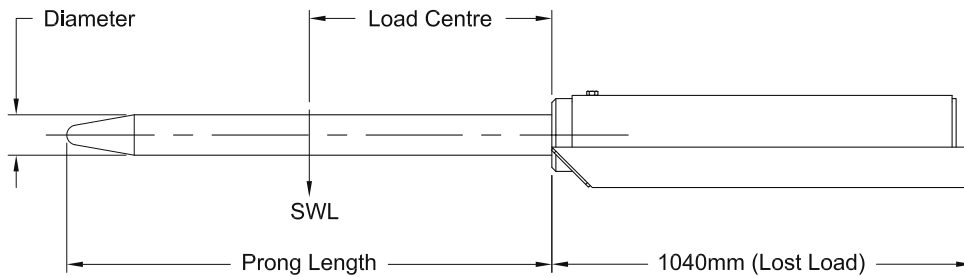


**Type RPS Slip-On Roll Prong**

Slip on roll prongs are quick and easy to mount on any forklift, although they are better suited to larger capacity forklifts due to the extended load centre created by the fork tines. Enamel paint finish.

*The Safe Working Load (SWL) of this unit varies depending on prong chosen. Please refer to the table below.*

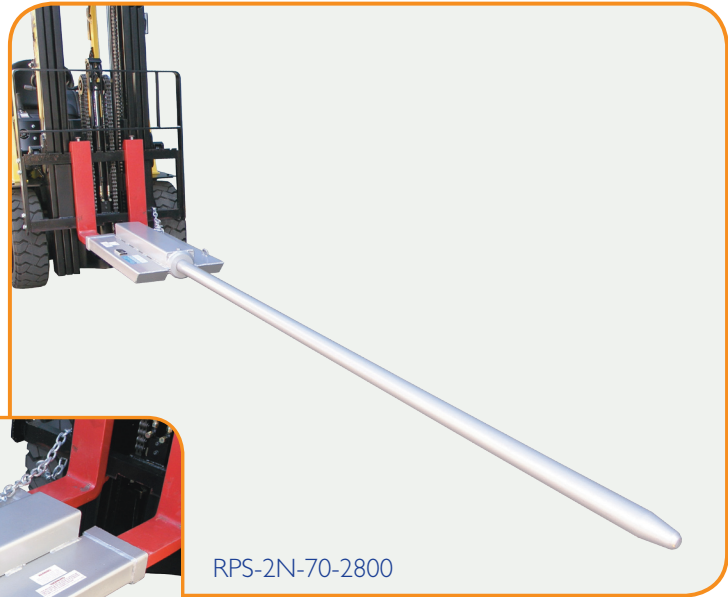

Type	Fork Pocket Size (mm)	Fork Pocket Centres (mm)	Prong Diameter (mm)	Prong Length (mm)	Safe Working Load / Load Centre	Unit Weight (kg)
RPS-2N-40-1200	190 x 65	345	40	1200	200 kg at 600 mm	91
RPS-2N-50-1800	190 x 65	345	50	1800	250 kg at 900 mm	106
RPS-2N-60-2800	190 x 65	345	60	2800	340 kg at 1400 mm	141
RPS-2N-70-2800	190 x 65	345	70	2800	510 kg at 1400 mm	163
RPS-2N-80-2800	190 x 65	345	80	2800	850 kg at 1400 mm	194
RPS-3N-90-2800	180 x 80	360	90	2800	1285 kg at 1400 mm	293
RPS-3N-100-2800	180 x 80	360	100	2800	1700 kg at 1400 mm	328

**OTHER PRONG LENGTHS AVAILABLE ON REQUEST**

*Please note the Safe Working Load shown has been calculated at the centre of the prong. If the product being lifted exceeds the length of the prong please contact East West Engineering for a revised Safe Working Load.*