


Type CK Concrete Kibble

Concrete Kibbles have been designed for easy transfer of concrete on site by overhead crane.

This lightweight, yet heavy duty kibble can be used for both bottom and side discharge, with the use of the adjustable chute. The unit is lever operated from either side for easy operation, and is also fitted with fork pockets for transport purposes. Enamel painted finish, Safety Yellow.

East West Engineering kibbles are supplied with full instructions, risk and hazard identification manuals.

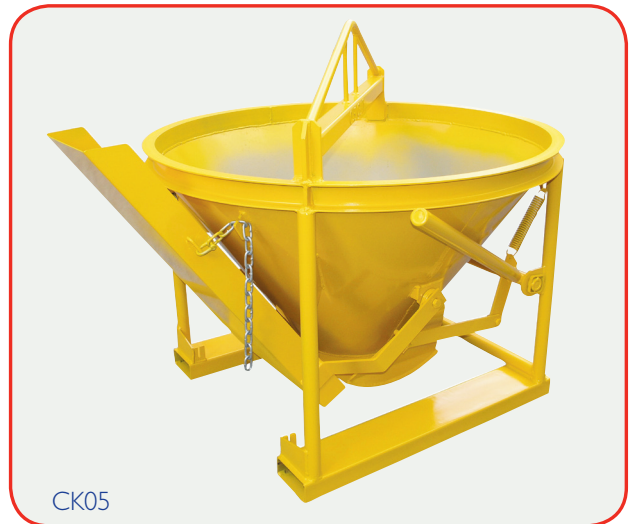

CK05

Type	Capacity	SWL	Unit Weight	Filling Height	Transport Dimensions (mm)
CK 05	0.5 cu. m	1500 kg	275 kg	995 mm	1450 x 1540 x 1380 high
CK 10	1.0 cu. m	3000 kg	320 kg	1295 mm	1450 x 1540 x 1680 high



Dual sided discharge lever



CK10 with side discharge chute in position



CK05 with chute in position for side discharge



CK10 with chute raised for bottom discharge