


Type GK Grout Kibble

The GK Grout Kibbles have been designed for bottom dumping of viscous materials including grout or equivalent liquids.

The handle positioning and use of a 'Layflat' hose allows an unobstructed view by the operator of the material pour. The unit is designed with a 300mm diameter butterfly valve to allow the operator to control the pour via the handle. Forklift pockets have been provided for transport about the work site.

The interior of the kibble has a smooth surface allowing for easy discharge and quick cleaning.

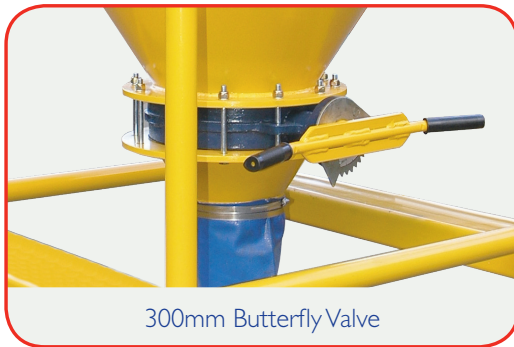

Type	Capacity	SWL	Unit Weight	Filling Height	Transport Dimensions (mm)
GK 05	0.5 cu. m	1500 kg	275 kg	1140 mm	1450 x 1450 x 1540 high
GK 10	1.0 cu. m	3000 kg	320 kg	1450 mm	1450 x 1450 x 1840 high

Type CC215 Concrete Collection Tray

Limit environmental damage onsite by use of the Concrete Collection Tray. This low profile tray fits under the concrete pump to collect spillage washout water and concrete waste. Fitted with fork pockets and crane lugs, the tray is constructed with tapering sides.

- Safe Working Load: 1500 kg
- Capacity: 0.85 cu. m
- Width: 2000 mm
- Depth: 1500 mm
- Height: 375 mm
- Unit Weight: 200 kg

